

Features

- 2:1/4:1 Wide Input Range
- Operating Temperature Range: -45~105°C
- Approved to CE, RoHS & REACH
- Safety Standards to IEC/UL/EN62368-1
- Efficiency up to 92%
- EMC Class A & B
- Single output 9~425V DC



Ideal Power's 28SQBvvvvvv-x-y-B150 150W Quarter Brick DC/DC Converters Series are certified to CE, RoHS, REACH & EN 62368-1/IEC 62368-1/UL 62368-1/EN 50155 Standards and comply with the relevant Efficiency Regulations. These are primarily used in ITE, Audio & Video, Railway Industries and customised solutions are available upon request.

Part Number Structure

Full Brick


28SQB	-	110	120	-	S	-	P	-	B	150
Series Name		Input Voltage (VDC)	Output Voltage (VDC)		Pin Out		Remote On/Off Options		Shape	W
Supreme Series		018: 9-36	050 : 5		S: Dosa		N: Negative logic.		B: Base Plate	150
Quarter Brick		024: 18-36	120: 12		V: Victor		P: Positive logic.		F: No Flange	
		036: 18-75	240: 24							
		110: 40-180	280: 28							
		300: 180-425	480: 48							

Models

Model Number	Input			Output			Efficiency
	Voltage (V)		Current (A) Full load	Voltage (V)	Current (A)	Power (W)	Typ.(%)
	Range	Nominal					
28SQB018050-□-□-□120	9-36	18	9.80	5	24	120	85
28SQB018120-□-□-□150	9-36	18	9.58	12	12.5	150	87
28SQB018240-□-□-□150	9-36	18	9.69	24	6.25	150	86
28SQB018280-□-□-□150	9-36	18	9.80	28	5.36	150	85
28SQB018480-□-□-□150	9-36	18	9.92	48	3.16	150	84
28SQB024050-□-□-□120	18-36	24	7.02	5	24	120	89
28SQB024120-□-□-□150	18-36	24	6.94	12	12.5	150	90
28SQB024240-□-□-□150	18-36	24	6.87	24	6.25	150	91
28SQB024280-□-□-□150	18-36	24	6.79	28	5.36	150	92
28SQB024480-□-□-□150	18-36	24	6.87	48	3.16	150	91
28SQB036050-□-□-□120	18-75	36	4.68	5	24	120	89
28SQB036120-□-□-□150	18-75	36	4.68	12	12.5	150	89
28SQB036240-□-□-□150	18-75	36	4.68	24	6.25	150	89
28SQB036280-□-□-□150	18-75	36	4.68	28	5.36	150	89
28SQB036480-□-□-□150	18-75	36	4.68	48	3.16	150	89
28SQB110050-□-□-□120	40-180	110	1.53	5	24	120	89
28SQB110120-□-□-□150	40-180	110	1.53	12	12.5	150	89
28SQB110240-□-□-□150	40-180	110	1.53	24	6.25	150	89
28SQB110280-□-□-□150	40-180	110	1.53	28	5.36	150	89
28SQB110480-□-□-□150	40-180	110	1.53	48	3.16	150	89
28SQB300050-□-□-□120	180-425	300	0.59	5	24	120	85
28SQB300120-□-□-□150	180-425	300	0.57	12	12.5	150	87
28SQB300240-□-□-□150	180-425	300	0.57	24	6.25	150	88
28SQB300280-□-□-□150	180-425	300	0.57	28	5.36	150	88
28SQB300480-□-□-□150	180-425	300	0.57	48	3.16	150	88

Description

Supreme series - Quarter Brick converter is composed of Isolated, board-mountable, fixed switching frequency DC-DC converters that use synchronous rectification to achieve extremely high-power conversion efficiency. These DC-DC converter modules use advanced power processing, control, and packaging technologies to enhance the performance, flexibility, reliability, and cost effectiveness of mature power components. Each module is six-sided metal case enclosed to provide protection from the harsh environments seen in many industrial and transportation applications.

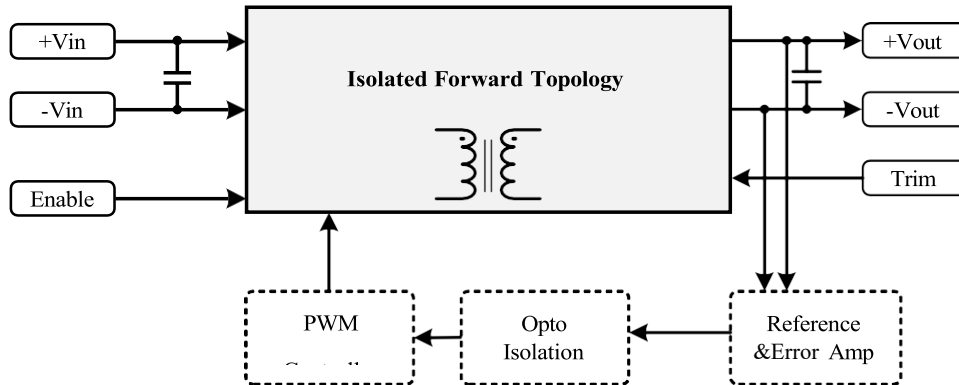

Input Specifications

Parameter	Conditions	Min	Typ	Max	Unit
Transient Input Voltage Ranges	28SQB018 models(100ms Max)	--	--	50	VDC
	28SQB024 models(100ms Max)	--	--	50	
	28SQB036 models(100ms Max)	--	--	100	
	28SQB110 models(100ms Max)	--	--	250	
	28SQB300 models(100ms Max)	--	--	500	
Operating Input Voltage Ranges	28SQB018 models	9	18	36	VDC
	28SQB024 models	18	24	36	
	28SQB036 models	18	36	75	
	28SQB110 models	40	110	180	
	28SQB300 models	180	300	425	
Over-Voltage Turn-off Voltage	28SQB018 models	--	--	50	VDC
	28SQB024 models	--	--	50	
	28SQB300 models	--	--	80	
	28SQB018 models	--	--	190	
	28SQB024 models	--	--	450	
Over-Voltage Turn-on Voltage	28SQB300 models	36	--	--	VDC
	28SQB018 models	36	--	--	
	28SQB024 models	75	--	--	
	28SQB300 models	180	--	--	
	28SQB018 models	425	--	--	

Input Specifications (continued)

Under-Voltage Lockout Turn-on Voltage	28SQB018 models	--	--	9	VDC
	28SQB024 models	--	--	18	
	28SQB300 models	--	--	18	
	28SQB018 models	--	--	40	
	28SQB024 models	--	--	180	
Under-Voltage Lockout Turn-off Voltage	28SQB300 models	--	8	--	VDC
	28SQB018 models	--	17	--	
	28SQB024 models	--	17	--	
	28SQB300 models	--	38	--	
	28SQB018 models	--	165	--	
Input Current		See model selection guide, Standby mode (OFF,UVLO) 8mA			
Enable Function Input	Positive logic	ON OFF	Open		VDC
	Negative logic	ON OFF	Short or 0 ~ 1.2		

Note: Typical @ Ta=+25°C under nominal line voltage conditions unless noted.

Output Specifications

Parameter	Conditions	Min	Typ	Max	Unit
Output Voltage Accuracy	VNOM 50% Load	--	--	±1.5	%
Line Regulation	Low Line to High Line	--	--	±0.3	
Load Regulation	10% to 100% Load	--	--	±0.5	
Output Ripple & Noise Voltage	Bandwidth 20MHz and with 1uF MLCC Output Capacitor	--	1.5	--	%Vpk-pk
Temperature Coefficient		--	--	±0.04	% / °C
Transient Recovery Time	25% load step change	--	800	--	µSec.
Transient Peak Deviation	ΔIo/Δt=2.5A/µs	--	±2	--	%Vo
Start-Up Time	When use Enable Function	--	20	--	mSec.
Trimming Output Voltage	VNOM 10% Load	--	±10	--	%
Over Voltage Protection	VNOM 10% Load	--	120	--	
Output Power Protection	VNOM	--	120	--	

General Specifications

Parameter	Conditions	Min	Typ	Max	Unit
Switching Frequency	V _{NOM}	--	250	--	KHz
Storage Temperature Range	All models	-60	--	125	°C
Operating Case Temperature	All models	-45	--	105	
Over temperature Protection	All models, auto. Recovery	--	110	--	
Isolation Voltage Input to Output	All models, 1 Minute	2250	--	--	VDC
Isolation Resistance Input to Output	All models, 500VDC,At 70%RH	100	--	--	MΩ
Isolation Capacitance Input to Output	All models	--	150 0	--	pF
Humidity (non-condensing)	All models	--	--	95	%
Calculated MTBF	BellCore-TR-332@ 50°C G.B	--	TBD	--	M HR
Thermal shock	Environmental Engineering Experimental Tests				MIL-STD-810F
Vibration					MIL-STD-810F
Drop					MIL-STD-810F
Weight	Shape-B (Base Plate)	59(2.08)		g(oz)	
	Shape-F (No Flange Base Plate)	56(1.97)			
Dimensions	Shape-B (Base Plate)	2.38" x 1.47" x 0.56" (60.4 x 37.3 x 14.2mm)			
	Shape-F (No Flange Base Plate)	2.38" x 1.08" x 0.56" (60.4 x 27.4 x 14.2mm)			
Case Material	Aluminum				
Potting Material	Silicone				

EMC Specifications

Parameter	Conditions	Level
Environmental Compliance	Reach; RoHS	PASS
EMI	EN55022	Class A / Class B
ESD	EN61000-4-2 ±4 kV Air Discharge ±4 kV Contact Discharge	Perf. Criteria A
Radiated immunity	EN61000-4-3 Level 2, 3 V/m	Perf. Criteria A
Fast transient	EN61000-4-4 ±2 kV Applied	Perf. Criteria A
Surge	EN61000-4-5 ±2 kV Applied	Perf. Criteria A
Conducted immunity	EN61000-4-6 Level 2, 3 V rms	Perf. Criteria A


It is recommended to protect the input by fuses or other protection devices.

Modules could meet EN55022 Class A and Class B standard with external components.

The information and specifications contained in this data sheet are believed to be correct at time of publication. All specifications are subject to change without notice. No rights under any patent accompany the sale of any such products or information contained herein.

Conducted EMI

Input terminal value (typ.) SQB018120-V-P-B150 @Vin = 18VDC, Iout = 12.5A

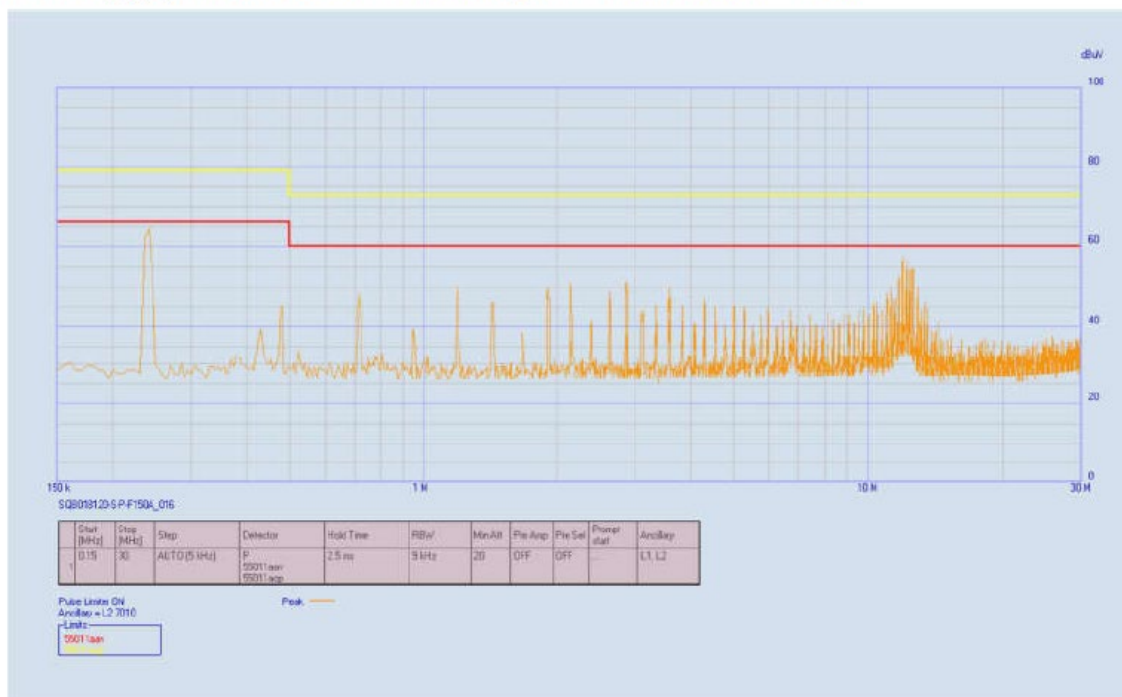

The fundamental switching frequency of the module is 260 kHz.

Characteristic Curve

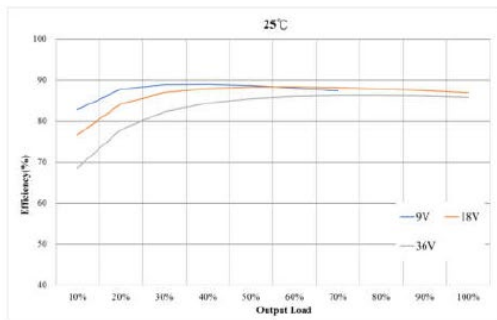


Figure 1 : Efficiency at Minimum, Nominal and Maximum Input Voltages VS. Output Load.

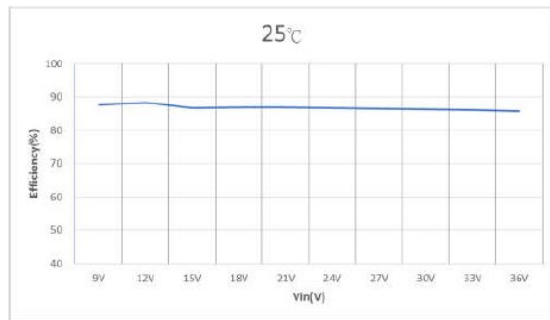


Figure 2 : Efficiency VS. Input Voltages at 100% rated power

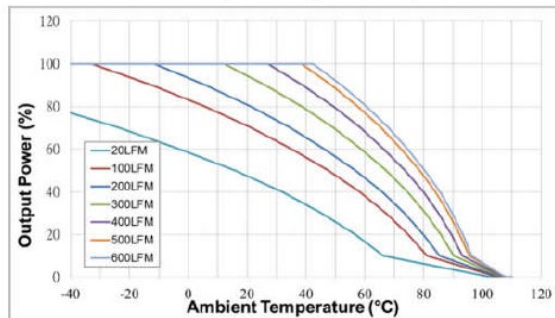


Figure 3 : Ambient Temperature VS. Output Power Derating Curves

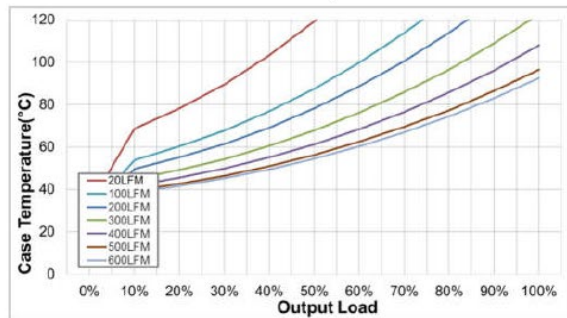


Figure 4 : Case Temperature VS. Output rated Power

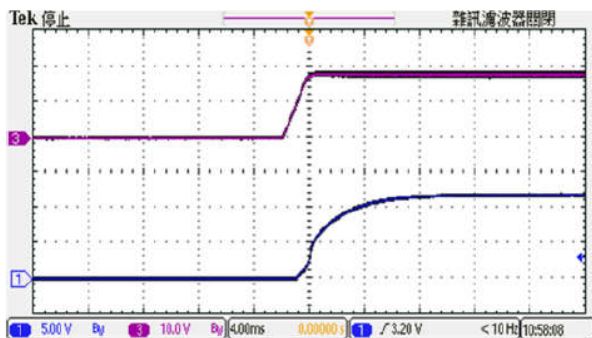


Figure 5 : CH1 = Vout, CH3 = Nominal Input
Typical Start-up waveform at Full load.

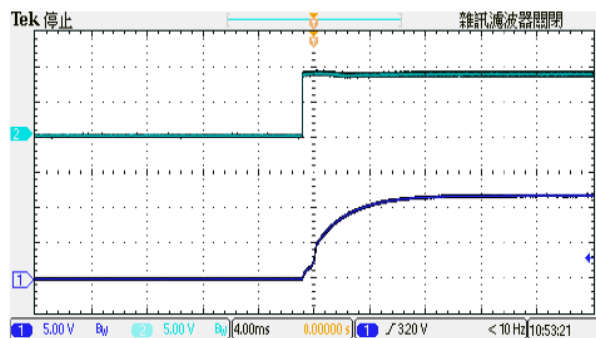


Figure 6 : CH1 = Vout, CH3 = Enable Pin
Typical Start-up waveform. Input voltage pre-applied

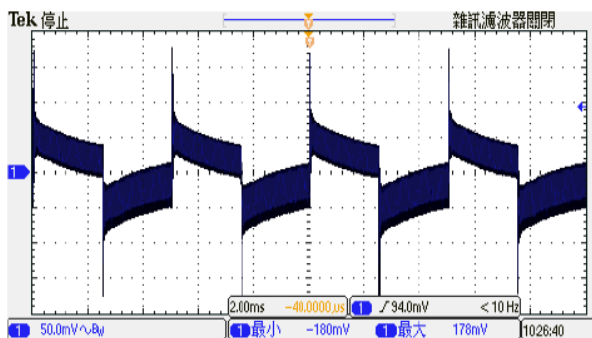


Figure 7 : Transient Response at Output step load
(Vin: Typical, 50~75% of output current; $\Delta I_o/\Delta t = 1A/\mu S$)

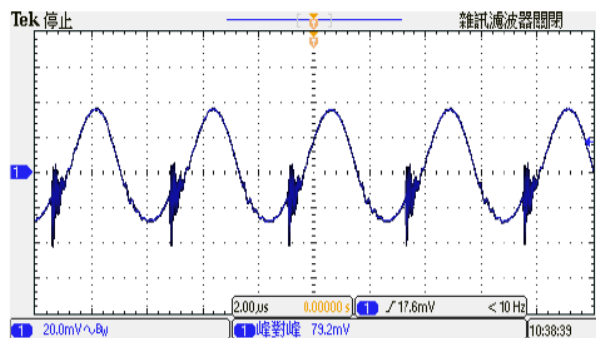
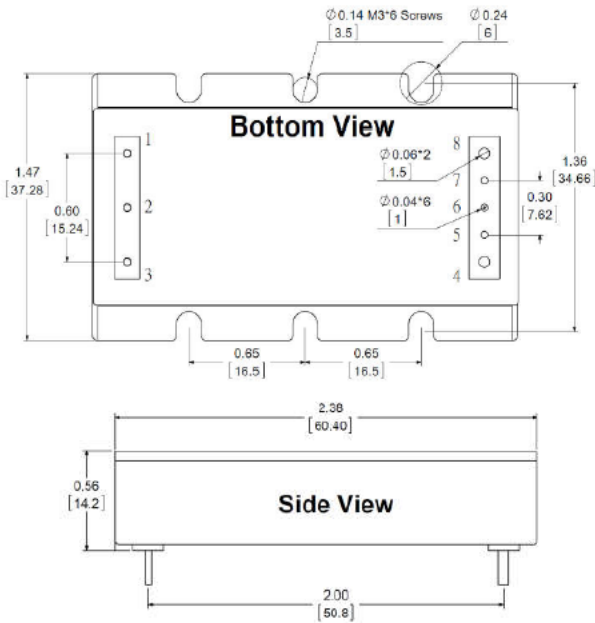
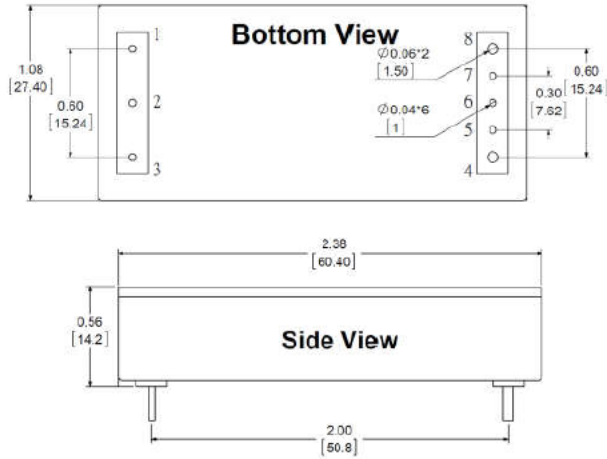
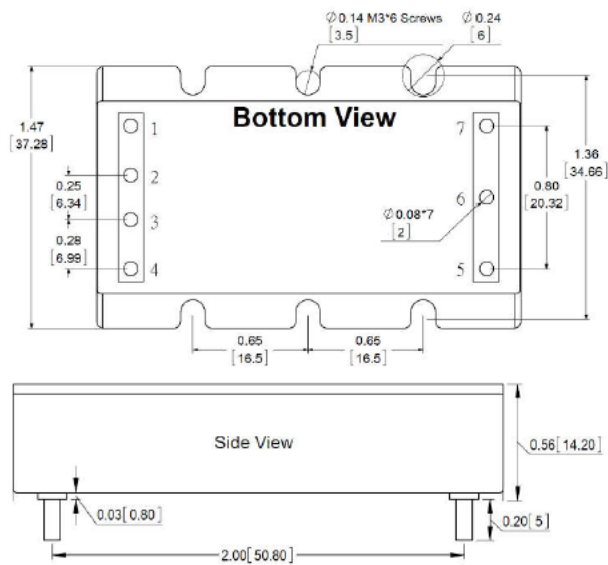
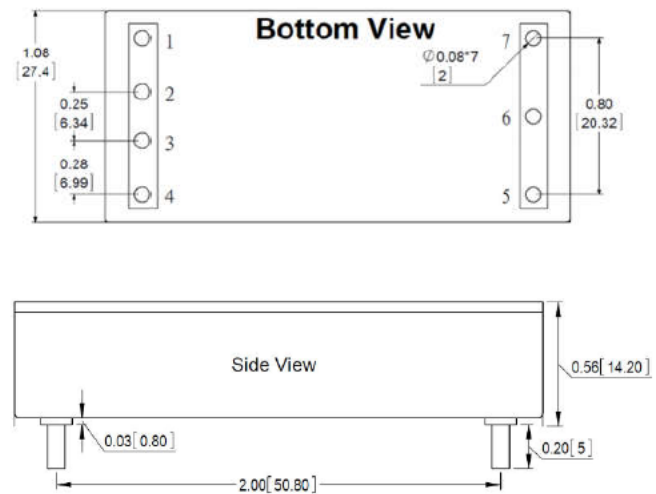


Figure 8 : Output Voltage Ripple & Noise at full load.
(Vin: Typical, With Output Capacitor to add 1uF MLCC)

Mechanical Drawing
Shape – B (Base Plate with DOSA pinout)

Shape – F (No Flange Base Plate with DOSA pinout)

Shape – B (Base Plate with Vicor pinout)

Shape – F (No Flange Base Plate with Vicor pinout)

Pin Connection

Pin#	Dosa	Vicor
1	-Vin	-Vin
2	Enable	NC
3	+Vin	Enable
4	+Vout	+Vin
5	+Sense	+Vout
6	Trim	Trim
7	-Sense	-Vout
8	-Vout	

Note:

Pin Material: Copper Alloy
 Pin Plating: Gold
 Dimensions in inches [mm]
 Tolerances: .XX±0.02 [.X±0.5mm]

Output Voltage Adjustment

Only the single output converters have a trim function. That allows users to adjust the output voltage from +10% to -10%, please refer to the trim table that follow for details. Adjustments to the output voltage can be used with a simple fixed resistor as shown in Figures 1 and 2. A single fixed resistor can increase or decrease the output voltage depending on its connection.

Note:

✂ Trim adjustments higher than the specified range can have an adverse effect on the converter's performance and are not recommended.

✂ If the trim function is not used, leave the trim pin open.

Trim Up




Figure 1. Trim Connections To increase Output Voltages Using Fixed Resistors

Trim up resistor value (KΩ)

Vout	1%	2%	3%	4%	5%	6%	7%	8%	9%	10%
5	109	50	30	20	14	10	7	5	3.3	2
12	258	115	67	44	29	20	13	7.8	3.8	0.6
24	514	232	137	90	62	43	30	20	12	5.5
28	602	271	161	105	72	50	34	22	13	5.9
48	1039	464	273	177	120	81	54	34	18	5

Trim Down




Figure 2. Trim Connections to Decrease Output Voltages Using Fixed Resistors

Trim up resistor value (KΩ)

Vout	1%	2%	3%	4%	5%	6%	7%	8%	9%	10%
5	137	62	37	25	17	12	9	6	4	2.2
12	358	162	96	63	44	31	21	14	8.9	4.5
24	769	352	213	143	102	74	54	39	28	18
28	860	392	236	158	111	80	57	41	28	17
48	1413	638	380	251	173	121	85	57	35	18

Enable Control Function

The primary-side, Enable Control function can be specified to operate with either positive or negative polarity. Positive-polarity devices are enabled when the enable pin is left open or is pulled high .

See "Enable Function Input.

Positive-polarity devices are disabled when the enable pin is pulled low (under +1.0V with respect to –input). Negative-polarity devices are off when the enable pin is high/open and on when the enable pin is pulled low. See Figure 3.

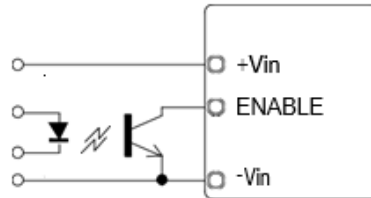


Figure 3. Driving the Enable Control pin

Output Ripple Noise

The two copper strips simulate real-world PCB impedances between the converter and its load. Scope measurements should be made using BNC connectors or the probe ground should be less than 1/2 inch and soldered directly to the fixture.

All external capacitors should have appropriate voltage ratings and be located as close to the converter as possible.

Temperature variations for all relevant parameters should be taken into consideration.

The most effective combination of external I/O capacitors will be a function of line voltage and source impedance, as well as load and layout conditions. See Figure 4.


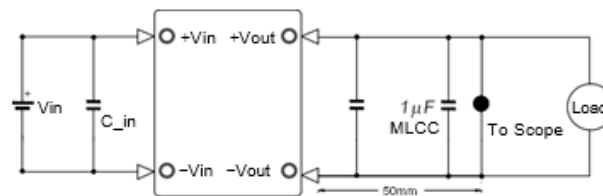


Figure 4. Measuring Output Ripple/Noise (20MHz bandwidth)

Trim Up

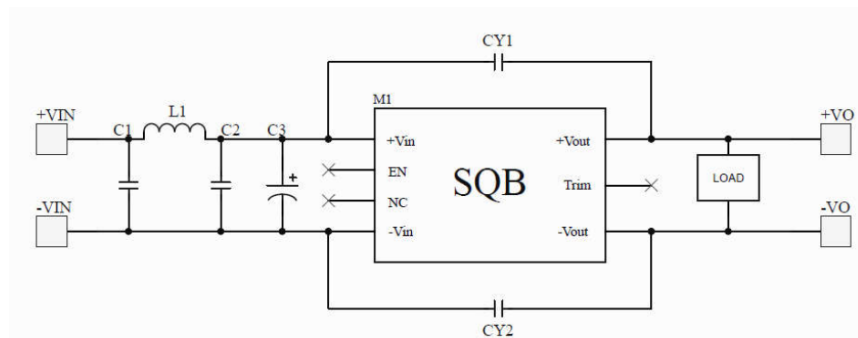

Bill of Materials

Model No.	C1	C2	C3	L1	CY1	CY2
28SQB018XXX	10uF/50V/MLCC	10uF/50V/MLCC	470uF/50V	7uH	1000pF/Y Cap	1500pF/Y Cap
28SQB110XXX	1uF/250V/MLCC	1uF/250V/MLCC	100uF/250V	30uH	1500pF/Y Cap	NC
28SQB300XXX	0.1uF/630V/ML	0.1uF/630V/ML	100uF/450V	190uH	NC	1500pF/Y Cap

Ideal Power Limited

14 Larks Way, Tree Beech Enterprise Park, Gunn, Barnstaple, Devon, England, EX32 7NZ.
www.idealpower.co.uk | salesupport@idealpower.co.uk | +44 (0) 1733 309865